



## NovoTouch BK2 series

Collaborative  
Touch Panel Solution

### Overview

The NovoTouch BK2 series is a 4K-UHD collaborative touch display solution for both education and business meetings. This series provides 65", 75", and 86" different display sizes with combining whiteboard, wireless collaboration, and digital signage functionalities. Additionally, BK2 series supports interactive IR touch technology and TÜV Rheinland Certified for the best touch and viewing experience.



Wireless Collaboration | Digital Whiteboard | Digital Signage





## Key feature

### Wireless Collaboration



- Screen sharing via NovoConnect software | AirPlay | Google Cast
- Wide-range compatibility (Windows | MacOS | Android | iOS | Chromebook | Ubuntu)
- Extended desktop



Primary Screen  
(User's laptop)



Extended Screen  
(serve as the secondary screen to User's laptop)

### Split Screen with FHD Resolution




Up to 8 participants can be connected and up to 2 can share their screen simultaneously. The BK2 series each split screen has 1080p high resolution.



## Whiteboard



- Dual-tip pen – Each tip-type (fine or thick) can have its own drawing color
- Tools : split screens, import PDF & media
- Partition whiteboard surface into regions, each of which is independent canvas for writing and drawing

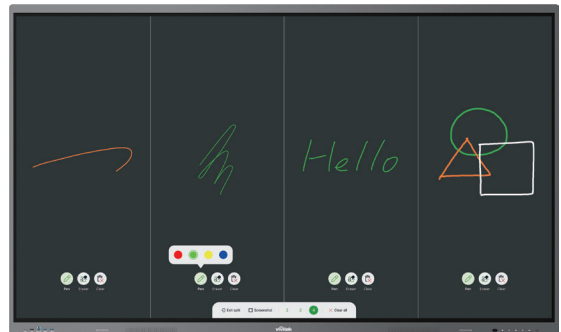

## Receiver Screen Duplication



The BK2 series supports NT Live Receiver which can has screen duplication across different room over the corporate network for large groups.



## Cloud-based Device Management



- Cloud service-no software installation
- Deploy Apps and upgrade firmware remotely
- Remote assist (remote snapshot & control)
- Device management by groups



## Digital Signage



- Dynamic content types
- Rich designer templates
- Emergency notification



## Dual Ethernet Interfaces

BK2 dual Ethernet ports provide users with the ability to daisy-chain devices, making it possible to connect both the BK2 panel and a computer to the internet, even with only one available port.



# Specifications

Model	BK652i	BK752i	BK862i
Display Technology	Backlit LED (IPS Panel)		
Panel Size	65"	75"	86"
Brightness	400cd/m2		
Contrast Ratio	1,200:1		
Native Resolution	4K-UHD (3840 x 2160)		
Viewing Angle (H/V)	178° / 178°		
Aspect Ratio	16:9		
Response Time (MS)	8ms		
Touch Technology	Infrared Touch		
Touch Points	20 Point (Standard)		
Refresh Rate (Hz)	60Hz		
Estimated Life Time (Typ)	30,000 hrs		
Display Color (Bit)	1.07 billion		
Installation Orientation	Landscape		
Daily Operation (Hours/Days)	16/7		
Dimensions (WxDxH)	1484.5 x 90 x 908 mm	1705.7 x 90.2 x 1032.3 mm	1953 x 90.2 x 1172.3 mm
Weight	39 kg (85 lbs)	50.8 kg (111 lbs)	63 kg (138 lbs)
VESA Mounting	4~M8 x 25 mm, 800 x 600 mm	4~M8 x 25mm, 800 x 400 mm	4~M8 x 25mm, 800 x 400 mm
Power Supply	AC 100~240V, 50/60Hz		
Power Consumption	220W <0.5W (Standby Mode)	330W <0.5W (Standby Mode)	410W <0.5W (Standby Mode)

Model	BK652i	BK752i	BK862i
System Version	Android™ 13		
CPU	4 Core		
RAM	4GB DDR3		
Internal Storage	32GB (eMMC Flash)		
Input Ports	HDMI v2.0 (x4), Mic (3.5mm x1)		
Output Ports	HDMI v2.0 (x1), Audio-out (3.5mm x1), SPDIF-out (x1), RS232 (x1)		
USB Ports	USB 2.0 (x1), USB 3.0 (x2), USB-C(x1,15W charging, display input), USB Type B (x2, for touch port)		
Expansion (OS slot)	80 pins OPS (Standard Intel OPS) (optional)		
LAN	RJ45 x2 (10/100/1000M MAC)		
WiFi	WiFi 6, IEEE 802.11 a/b/g/n/ac/ax (2.4GHz/5GHz)		
Internal Speakers	16W (x2) (Stereo)		
Accessories (Standard)	AC Power Cord, Stylus (x2), Remote Control (W/Batteries), Wall Mount Kit, HDMI Cable(3M), Touch Cable(3M), WiFi Antenna(x3), Documentation Kit		



Visit [www.vivitekc corp.com](http://www.vivitekc corp.com) for more product info  
Copyright (c) 2024 Delta Electronics, Inc. All Rights Reserved

A brand of  **DELTA**